

4K 20X Muti-Function Professional PTZ Camera



Feature

- 4K Ultra Resolution Output
- 60"Wide Angle Zoom-in Lens+ 20X Optical Zoom Lens
- Support USB3.0 and BYOM Service
- Support POE power and Built-in G-SENSOR.
- HDMI, SDI, IP, USB Multi Video Outputs
- Remote Control

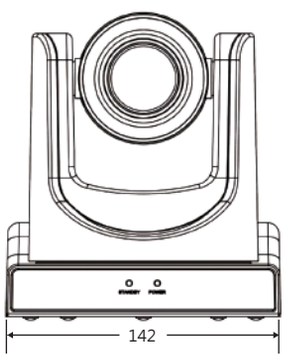

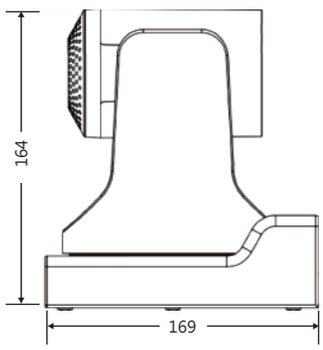

Specification

Model		SVC-4KZ20i
Name		4K 20X Muti-Function Professional PTZ Camera
LENS	Lens Video Output	4K(3840x2160P) 60/59.94/50/30/29.97/25fps,1080P 60/59.94/50/30/29.97/25fps,1080i 60/59.94/50fps
	Sensor	1/1.8", CMOS, Effective Pixels: 8.51M
	Lens	20x Zoom Lens: Focus f=6.7mm ~ 125mm, F1.58 ~ F3.95; Horizontal View: 60° ~ 3.5°, Vertical View: 35.7° ~ 2.0°
	S/N Ratio and Minimum Lux	≥55dB, 0.5Lux (F1.8, AGC ON)
	Advanced Video Processing	Auto Focus, White Balance (Auto, Indoor, Outdoor, One Push, Manual), BLC, 2D&3D DNR (Digital Noise Reduction)
	PTZ Degrees & Speed	Horizontal: ±170°, Speed: 1.7° ~ 100°/Sec, Vertical: -30° ~ +90°, Speed: 1.7° ~ 69.9°/Sec, Auto Vertical Flip (Built-in G-Sensor)
	Preset Points & Precision	255, 0.1°
	Camera Control Protocol	VISCA/Pelco-D/Pelco-P(RS-232/RS-485), VISCA over IP(RJ-45), ONVIF(RJ-45), UVC(USB)
USB FUNCTION	Operating System	Windows 7 (1080P or less resolution), Windows 8.1, Windows 10 or above / Mac OS 10.10 or above / Google Chromebook 29.0.1547.70 Ver. or above / Linux
	Coding/Compressing	YUY2(Support up to 1080 30fps) / H.264(AVC/SVC) / MJPEG / H.265(Support up to 2160 60fps)
	USB UVC Protocol	UVC 1.5, PTZ Control
IP Camera	Video Compressing	H.265 / H.264 / MJPEG
	Video Streaming	32Kbps ~ 20480Kbps, Variable Rate / Fixed Rate
	Audio Format & Rate	AAC, 48/64/96/128Kbps
Interface	Video Out	1xHDMI (2.0 Ver.), 1x3G-SDI (BNC Type)
	Audio Output Rate	32Kbps ~ 20480Kbps, Variable Rate/Fixed Rate
	Network	1x Ethernet (10M/100M/1000M); POE; NDI (Option)
	USB	1xUSB 3.0(Type C)
	Control I/O	1xRS232 In (8pin Mini DIN), 1xRS232 Output (8pin Mini DIN), 1xRS485(2pin Phoenix Port)
	Power Connector	JEITA Type (DC IN 12V)
Normal	Input Power	DC 12V / POE(802.3af)
	Power Consumption	12W (Max)
	Temp	Operating: -10°C ~ 40°C, Storage: -40°C ~ 60°C
	Dimensions (WxDxH)	142mm x 169mm x 164mm
	Weight	1.35Kg