UPro
UPro Medical Inc.

# MEDICAL PRODUCT CATALOG




## UPro Medical Inc.

www.upromedical.com

Copyright © UPro Medical Inc. All Rights Reserved.

SHANY x UPro
UPro Medical Inc.

UPro
UPro Medical Inc.

# About UPro



**UPro Medical** specialize in manufacturing fine medical instruments for surgery, such as endoscopes and light sources.

Our own excellent R&D team is constantly forward to the latest technology. In the spirit of research and development, innovation, and breakthrough, to create accurate and humanized stable surgical instruments.

Also, provide customized needs for customers and healthcare team members, and timely technical support. To create precision instruments that can improve surgical accuracy and reduce risk and time costs.






# YOUR BEST PARTNER



TEL ：+886-2-2659-0070
FAX ：+886-2-2658-4626
E-MAIL：sandy-tang@upromedical.com
ADD ：4F., No. 92, Sec. 1, Neihu Rd., Neihu Dist., Taipei City 114 , Taiwan (R.O.C.)

UPro
UPro Medical Inc.

MEDICAL ENDOSCOPY
LED LIGHT SOURCE
CUSTOMIZED MODULE
MEDICAL MONITOR
PTZ CAMERA
MEDICAL PERIPHERALS

# CONTENTS


**Medical Endoscopy Image System** 02

3D 4K 60fps Binocular ICG Medical Endoscopy Image System 02

4K 60fps Ultra HD Medical Endoscopy Image System 04

1080P 60fps Medical Endoscopy Image System 06

3-in-1 Orthopedics/ Veterinary Medical Endoscopy Image System 08

**Medical Endoscopy NIR/ ICG LED Light Source** 10

**Medical Customized Module** 12

**3D 4K Medical Monitor** 13

**4K 20X Muti-Function Professional PTZ Camera** 16

**Medical Peripherals** 17

Laparoscopic Trainer 19

Arthroscopy Trainer 19

Medical Endoscope Trolley 19


High-quality OEM/ODM Medical Product Customization Services


# 3D 4k 60fps Binocular ICG Medical Endoscopy Image System





The latest 3D 4K 60fps Endoscopic ICG imaging system combines "4K+3D+ICG" image processing technology to achieve five key features: high definition, three-dimensional imaging, accuracy, speed, and safety. Utilizing 4K60fps high-definition 3D stereoscopic optical depth processing technology, it creates realistic images that help doctors perform surgeries more quickly, accurately, and safely.

## Feature

- **3D** True Binocular Optical 3D Structural Imaging.
- **4K60** True 4K60fps image output technology, creating ultra-clear and smooth video without lag.
- **ICG** Supports Green ICG Fluorescent.
- Supports touch panel control.
- **Record** External USB support for full HD 4K60fps screenshot and video recording.
- **Mode** Supports six different medical modes.



White LED Light Source



ICG LED Light Source

Welcome OEM/ODM products

# 3D 4k 60fps Binocular ICG Medical Endoscopy Image System



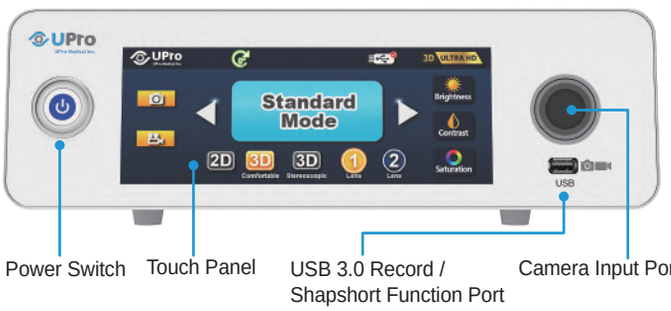


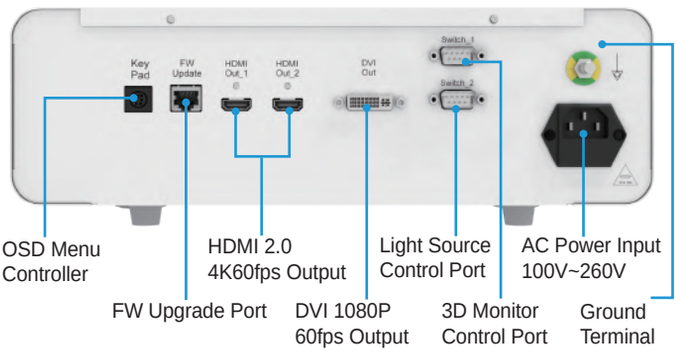
## Specification

| Model | | UPE-C4K03DD | UPE-C4K05DD | UPE-C4K05DE |
|---|---|---|---|---|
| Name | | Scalar 3D 4K 60fps Binocular ICG Laparoscope Image System | 3D 4K 60fps Binocular ICG Laparoscope Image System | 3D 4K 60fps Binocular ICG Laparoscope Image System |
| Image | Live Resolution | 4096*2160P Scaler 60fps<br>3840*2160P Scaler 60fps<br>1920*1080P 60fps | 4096*2160P 60fps<br>3840*2160P 60fps<br>1920*1080P 60fps | |
| | Sensor | Sony 1/2.5” | Sony 1/2.8” | |
| | Photo Resolution | 3840*2160P | | |
| | Record Resolution | 3840*2160P 30fps | 3840*2160P 60fps | |
| Hardware | Output Interface | HDMI_Out1, HDMI_Out2, DVI_Out, DI/DO, D-Sub_Out | | |
| | Input Interface | USB2.0, In/ S-Sub_In | | |
| Function | Handle Button Function | Snapshot, Record, White light/ICG Mode Switching, White Balance Control | | |
| | White Balance | Auto, Manual | | |
| | Touch Panel Mode | Standard Mode, Stomach Mode, Liver & Gallbladder Mode, Gynecology Mode, Small Scopical Mode | | |
| | ICG Mode | NIR ICG Blue and Green Modes | | |
| | Screen Mode | Single Screen Mode, ICG PIP Mode, Digital Zoom In/Out Mode | | |
| | Language | Chinese, English, Japanese | | |
| Video & Photo | USB Storage Device | Support snapshot & record, maximum 512G | | |
| | Video Format | 30—120min / MP4 | | |
| | Compression Format | H.265/H.264 | | |
| | Photo Format | JPG | | |
| General | Power Supply | 220V±22V, 50Hz±5Hz | | |
| | Size | 340(W)*105mm(H)*400/410(D) | | |

# 4K 60fps Ultra HD Medical Endoscopy Image System

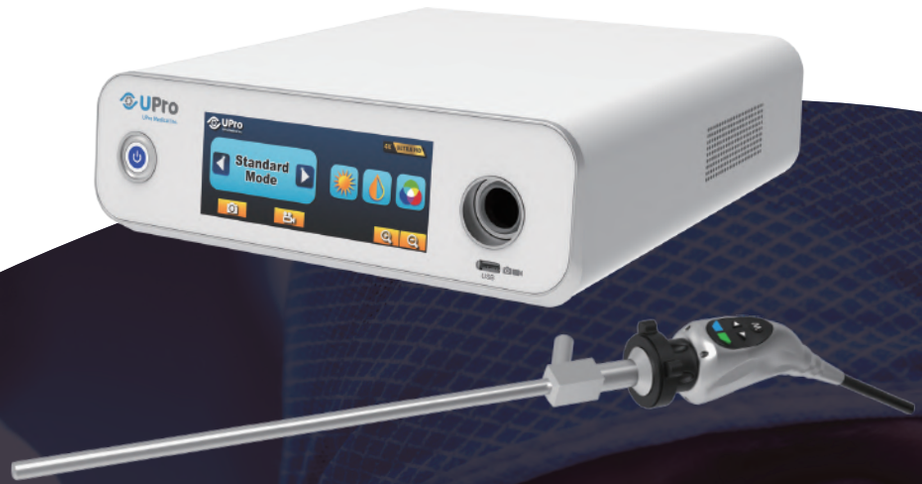


Our 4K 60fps image processing technology utilizes the SONY ultra-high-definition CMOS Sensor to enhance image details and blood vessel color rendering. This ensures ultra-high-definition, smooth, clear, and delay-free surgical images are displayed.

## Feature

- Sony sensor 4k high-definition image
- Support real-time video and photo recording (up to 512G), can record 30-120 minutes/ MP4
- Output interface: HDMI
- Input interface: USB2.0/ S-Sub_In
- Support Chinese, English and Japanese languages
- Handle button functions: screenshot, video recording, white light/ICG mode switching, white balance control
- Support White Balance Auto/ Manual
- Support NIR ICG Blue and Green Modes
- Touch panel mode: standard mode, stomach mode, liver and gallbladder mode, gynecology mode, Scopical Mode
- Display mode: single screen mode, ICG PIP mode, digital zoom in/out mode

Welcome OEM/ODM products


# 4K 60fps Ultra HD Medical Endoscopy Image System







Power Switch
Touch Panel
USB 3.0 Record / Shapshort Function Port
Camera Input Port

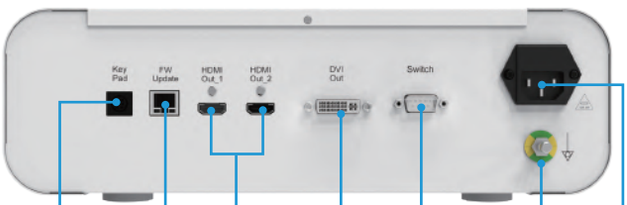


OSD Menu Controller
FW Upgrade Port
HDMI 2.0 4K60fps Output
DVI 1080P 60fps Output
Light Source Control Port
Ground Terminal
AC Power Input 100V~260V

## Specification

| Model | | UPE-C4K03 | UPE-C4K05 |
|---|---|---|---|
| **Name** | | **4K 60fps Ultra HD Medical Endoscopy Image System** | **4K 60fps Ultra HD Medical Endoscopy Image System** |
| Image | Live Resolution | 4096*2160P Scaler 60fps<br>3840*2160P Scaler 60fps<br>1920*1080P 60fps | 4096*2160P 60fps<br>3840*2160P 60fps<br>1920*1080P 60fps |
| | Sensor | Sony 1/2.5” | Sony 1/2.8” |
| | Photo Resolution | 3840*2160P | |
| | Record Resolution | 3840*2160P 30fps | 3840*2160P 60fps |
| Hardware | Output Interface | HDMI Out1, HDMI Out2, DVI Out, DI/DO, D-Sub Out | |
| | Input Interface | USB2.0, In/ S-Sub In | |
| Function | Handle Button Function | Snapshot, Record, White light/ICG Mode Switching, White Balance Control | |
| | White Balance | Auto, Manual | |
| | Touch Panel Mode | Standard Mode, Stomach Mode, Liver & Gallbladder Mode, Gynecology Mode, Small Scopical Mode | |
| | ICG Mode | NIR ICG Blue and Green Modes | |
| | Screen Mode | Single Screen Mode, ICG PIP Mode, Digital Zoom In/Out Mode | |
| | Language | Chinese, English, Japanese | |
| Video & Photo | USB Storage Device | Support snapshot & record, maximum 512G | |
| | Video Format | 30—120min / MP4 | |
| | Compression Format | H.265/H.264 | |
| | Photo Format | JPG | |
| General | Power Supply | 220V±22V, 50Hz±5Hz | |
| | Size | 340(W)*105mm(H)*400/410(D) | |

# 1080P 60fps Medical Endoscopy Image System




Our 1080P 60fps image processing technology utilizes the SONY ultra-high-definition CMOS Sensor to enhance image details and blood vessel color rendering. This ensures ultra-high-definition, smooth, clear, and delay-free surgical images are displayed.


## Feature


- Sony sensor high-definition image
- Support real-time video and photo recording (up to 512G), can record 30-120 minutes/ MP4
- Output interface: HDMI
- Input interface: USB2.0/ S-Sub_In
- Support Chinese, English and Japanese languages
- Handle button functions: screenshot, video recording, white light/ ICG mode switching, white balance control
- Support White Balance Auto/ Manual
- Support NIR ICG Blue and Green Modes
- Touch panel mode: standard mode, stomach mode, liver and gallbladder mode, gynecology mode, Scopical Mode
- Display mode: single screen mode, ICG PIP mode, digital zoom in/ out mode

Welcome OEM/ODM products

# 1080P 60fps Medical Endoscopy Image System

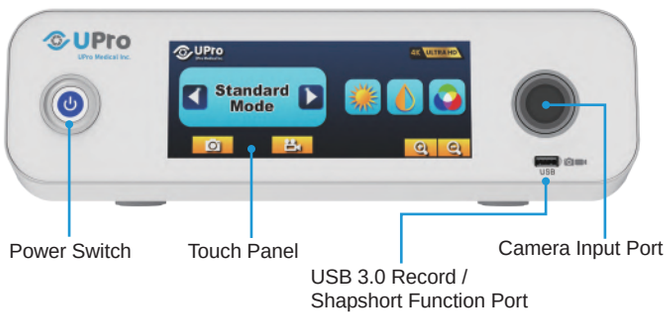


## Specification
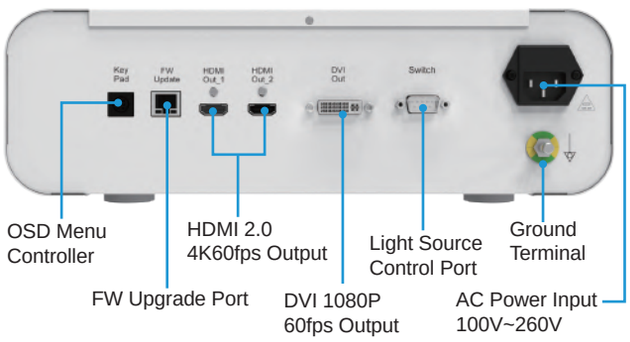
| Model | | UPE-C2K01 |
|---|---|---|
| **Name** | | **1080P 60fps Medical Endoscopy** |
| Image | Live Resolution | 1920*1080P 60fps |
| | Sensor | Sony 1/2.8” |
| | Photo Resolution | 3840*2160P |
| | Record Resolution | 1920*1080P 60fps |
| Hardware | Output Interface | HDMI_Out1, HDMI_Out2, DVI_Out, DI/DO, D-Sub_Out |
| | Input Interface | USB2.0, In/ S-Sub_In |
| Function | Handle Button Function | Snapshot, Record, White light/ICG Mode Switching, White Balance Control |
| | White Balance | Auto, Manual |
| | Touch Panel Mode | Standard Mode, Stomach Mode, Liver & Gallbladder Mode, Gynecology Mode, Small Scopical Mode |
| | ICG Mode | NIR ICG Blue and Green Modes |
| | Screen Mode | Single Screen Mode, ICG PIP Mode, Digital Zoom In/Out Mode |
| | Language | Chinese, English, Japanese |
| Video & Photo | USB Storage Device | Support snapshot & record, maximum 512G |
| | Video Format | 30—120min / MP4 |
| | Compression Format | H.265/H.264 |
| | Photo Format | JPG |
| General | Power Supply | 220V±22V, 50Hz±5Hz |
| | Size | 340(W)*105mm(H)*360/370(D) |

# 3-in-1 Orthopedics/ Veterinary Medical Endoscopy Image System




Our 4K 60fps image processing technology utilizes the SONY ultra-high-definition CMOS Sensor to enhance image details and blood vessel color rendering. This ensures ultra-high-definition, smooth, clear, and delay-free surgical images are displayed.

## Feature


- Sony sensor high-definition image
- Support real-time video and photo recording (up to 512G), can record 30-120 minutes/ MP4
- Output interface: HDMI
- Input interface: USB2.0/S-Sub_In
- Support Chinese, English and Japanese languages
- Handle button functions: screenshot, video recording, white light/ ICG mode switching, white balance control
- Support White Balance Auto/ Manual
- Support NIR ICG Blue and Green Modes
- Touch panel mode: standard mode, stomach mode, liver and gallbladder mode, gynecology mode, Scopical Mode
- Screen mode: single screen mode, ICG PIP mode, digital zoom in/out mode

Welcome OEM/ODM products

# 3-in-1 Orthopedics/ Veterinary Medical Endoscopy Image System



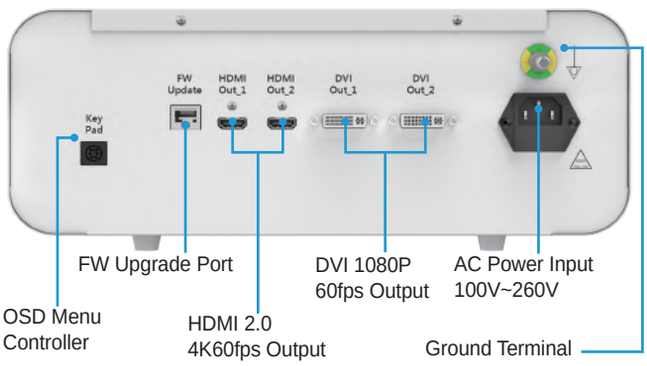


## Specification


| Model | | UPE-3C2K01 | UPE-3C4K03 |
|---|---|---|---|
| Name | | 2K 60fps 3-in-1 Orthopedics/ Veterinary Endoscopy Image System | 4K 60fps 3-in-1 Orthopedics/ Veterinary Endoscopy Image System |
| Image | Live Resolution | 1920*1080P 60fps | 4096*2160P Scaler 60fps<br>3840*2160P Scaler 60fps<br>1920*1080P 60fps |
| | Sensor | Sony 1/2.8” | Sony 1/2.5” |
| | Photo Resolution | 1920*1080P | 3840*2160P |
| | Record Resolution | 1920*1080P 60fps | 3840*2160P 30fps |
| Hardware | Output Interface | HDMI_Out1, HDMI_Out2, DVI_Out, DI/DO, D-Sub_Out | |
| | Input Interface | USB2.0, In/ S-Sub_In | |
| Function | Handle Button Function | Snapshot, Record, White light/ICG Mode Switching, White Balance Control | |
| | White Balance | Auto, Manual | |
| | Touch Panel Mode | Standard Mode1, Standard Mode2, Standard Mode3, Standard Mode4 | |
| | Screen Mode | Single Screen Mode, Digital Zoom In/Out Mode | |
| | Language | Chinese, English, Japanese | |
| Video & Photo | USB Storage Device | Support snapshot & record, maximum 512G | |
| | Video Format | 30—120min / MP4 | |
| | Compression Format | H.265/H.264 | |
| | Photo Format | JPG | |
| General | Power Supply | 220V±22V, 50Hz±5Hz | |
| | Size | 340(W)*105mm(H)*350(D) | |

# Medical Endoscopy NIR/ ICG LED Light Source






White LED
Light Source



ICG LED
Light Source

Blue & green ICG imaging technology enables doctors to quickly and accurately identify critical information, such as major blood vessels and tumors. This reduces surgical time and risks, significantly enhancing the outcomes of endoscopic surgeries.

## Feature

- General — Compatible with various medical endoscopy systems
- ICG — NIR/ICG Blue & Green Light Sources: Aid in identifying blood vessels and tumors
- Long Life — Service life of no less than 60,000 hours or 5 years
- Supports touch panel control

Welcome OEM/ODM products

# Medical Endoscopy NIR/ ICG LED Light Source








Power Switch

Touch Panel

Light Cable
Input Port

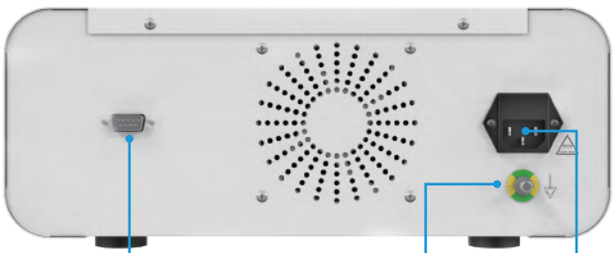

Light Source
Control Port


Ground
Terminal

AC Power Input
100V~260V

## Specification

| Model | UPE-WLS1 | UPE-NLS1 |
|---|---|---|
| Name | Medical Endoscopy<br>NIR/ ICG LED Light Source | Medical Endoscopy<br>NIR/ ICG LED Light Source |
| Light Source | LED Light Emitting Sensor | |
| Color rendering index | Ra≥70 | |
| Light Uniformity | 0.7 | |
| Service Life | Not less than 60,000 hours or 5 years | |
| Handle Button Function | Snapshot, Record, White LED mode,<br>White Balance Control | Snapshot, Record, White light/<br>ICG Mode Switching, White Balance Control |
| LED Color Temperature | 6,000K | |
| Lumens | 2,000Lm | |
| Wave Range | 380nm～810nm/Can meet white led illumination | 380nm~810nm / Can meet white<br>led and ICG blue & green lighting |
| Max Noise | Not more than 60dB (A) | |
| Power Supply | 150VA | |
| Size | 340(W)*105mm(H)*400/410(D) | |

# Medical Customized Module

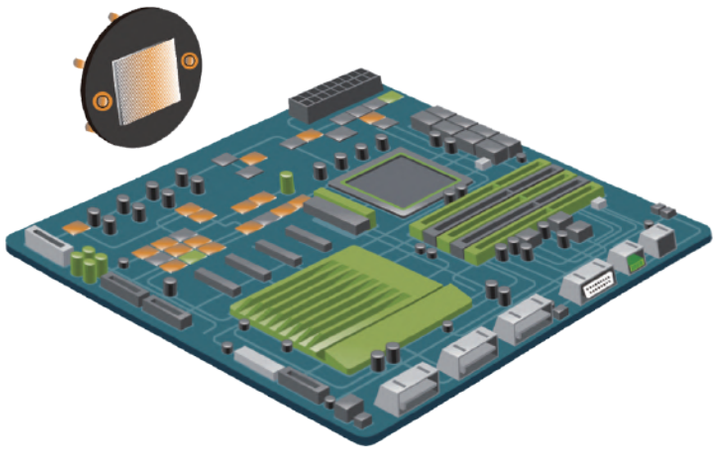

Our high-quality Taiwanese R&D team and factory production capabilities enable us to offer exceptional OEM/ODM medical module customization services. These services are tailored to various surgical scenarios in hospitals and meet our customers' specific requirements. Additionally, we provide timely firmware upgrades and comprehensive after-sales support.

## Specification

| Name | | 1080P 60fps Customized Module | 4K Scaler 60fps Customized Module | 4K 60fps Customized Module<br>3D 4K 60fps Customized Module |
|---|---|---|---|---|
| Image | Live Resolution | 1920*1080P 60fps | 4096*2160P Scaler 60fps<br>3840*2160P Scaler 60fps<br>1920*1080P 60fps | 4096*2160P 60fps<br>3840*2160P 60fps<br>1920*1080P 60fps |
| | Sensor | Sony 1/2.8” | Sony 1/2.5” | Sony 1/2.8” |
| | Photo Resolution | 1920*1080P | 3840*2160P | |
| | Record Resolution | 1920*1080P 60fps | 3840*2160P 30fps | 3840*2160P 60fps |
| Hardware | Output Interface | HDMI Out1、HDMI Out2、DVI Out、DI/DO、D-Sub Out | | |
| | Input Interface | USB2.0 In, S-Sub In | | |
| Video & Photo | USB Storage Device | Support snapshot & record, maximum 512G | | |
| | Video Format | 30—120min / MP4 | | |
| | Compression Format | H.265/H.264 | | |
| | Photo Format | JPG | | |
| General | Power Supply | 220V±22V, 50Hz±5Hz | | |

UPro
UPro Medical Inc.


# 3D 4K Medical Monitor




The wide-viewing-angle Glass Pattern Retarder 3D medical monitor features a 32” 4K high-resolution display with high contrast and a wide color gamut. This technology enhances the depth of field clarity, allowing doctors to perform movements more efficiently.
The wide-viewing-angle 3D display also reduces crosstalk, which can occur due to different viewing angles during operations.

# 3D 4K Medical Monitor

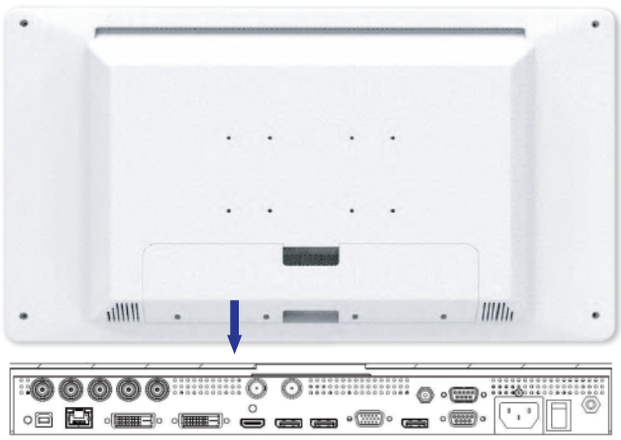

## Feature


- Real time rendering 3D image (<1ms）
- Rendering 3D image by display
- Side by side image from endoscopy
- Rendering 3D image by 3D display

## Specification

| Model | | SLD-324K3D |
|---|---|---|
| Name | | 3D 4K MEDICAL MONITOR |
| LCD Panel | Technical | TFT active matrix (AM) liquid-crystal panel (LCD); LED backlight |
| | Active display area | 32 inch (Diagonal); 708.48 mm (H) x 398.52 mm (V) |
| | Aspect Ratio (H; V) | 16:9 |
| | Resolution | 3840 x 2160 |
| | Pixel pitch | 0.1845 mm x 0.1845 mm |
| | Color Depth | 1.07G colors (True 10-bits) |
| | Color gamut | 100% Adobe, 98% DCI-P3; Calibrated: BT.709, BT.2020 |
| | View angle | 178° Hor / 178° Ver |
| | Luminance | Native: 850 cd/m² (maximum); After AR glass: 600 cd/m² (typical) |
| | Contrast | 1500:1 (typical) |
| | Response time | 20 ms (Tr + Tf), typical |
| | Color temperature | Native: 6500K; Calibrated: 9300K, 5800K |
| | Gamma | Native, 1.8, 2.0, 2.2, 2.4, DICOM, HDR |
| | Surface Treatment | AR+AS coating with True Flat Front (Glass: 2.8 mm) |
| | Transparency | ≥ 93% (Anti-Reflective) |
| | Anti-Sludge | > 95° (angle) |
| | Technology | Projective Capacitive Touch |
| 3D Parameters | Resolution | UHD 3840x2160, FHD 1920x1080, HD 1080x720 |
| | 3D viewing distance | 700 mm (A: minimum), 1500 mm (C: optimal) |
| | Vertical view angle | 33° up/down (crosstalk <7%) at optimal viewing distance |
| | Lens type | Circular polarization: Right eye on top |
| | Video latency | 10 ms typical (standard 50/60Hz FHD or 4K signal without PIP or rotation) |
| Environment | Environment Operating | Ambient temperature: 0°C to 40°C (32°F to 104°F)<br>Relative humidity: 10% to 90% R.H. (Non-condensing)<br>Atmospheric pressure: 500 hPa to 1,060 hPa |
| Power | Power Supply | On: < 150 W |
| | Power consumption | Stand-by: < 40 W |
| Mechanical Specification | Dimension | 764.2 mm x 468.6 mm x 79 mm (w/o stand) |
| | Weight | Approx. 13.2 kg (w/o stand) |

# 3D 4K Medical Monitor

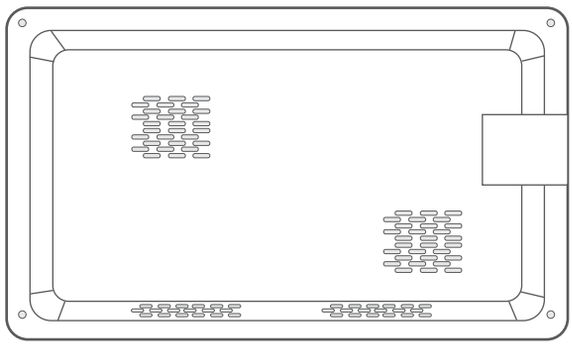

## Feature

- Real time rendering 3D image (<1ms)
- Rendering 3D image by display
- Side by side image from endoscopy
- Rendering 3D image by 3D display

## Specification


| Model | SLD-274KN3D | |
|---|---|---|
| Name | NAKED EYE 3D MONITOR | |
| LCD Panel | Technology | TFT active maxtri (AM) Liquid-crystal panel (LCD); LED backlight |
| | Screen Size | 27-inch |
| | Optimal Resolution | Ultra HD 3840 x 2160 |
| | Aspect Ratio | 16:09 |
| | Pixel Pitch | 0.1554(H) * 0.1554(V) mm |
| | Refresh Rate | 60Hz |
| | Viewing Angle | Horizontal: 178°; Vertical: 178° |
| | Best 3D Viewing Distance | 40 cm - 100 cm |
| | Contrast Ratio | 1000:01:00 |
| | Color Gamut | sRGB 99% (typ) |
| | Supported Interface | HDMI 2.0 x 1 |
| | Surface Treatment | Anti-reflective coating |
| | RoHS | RoHS, Halogen Free |
| 3D parameter | Image Resolution | 2K per eye in 3D mode |
| | 3D Rendering | By FPGA |
| | Image Source Support | Half Side by side |
| | Viewing Angle | Horizontal: ± 35° Vertical: -40° / +20° |
| Power | Power Supply | 60W |
| Mechanical Specification | Dimension | Display Only: 635.8 x 417.3 x 44.7 mm<br>Display with Stand: 440~550 x 635.8 x 170 mm |
| | Weight | Approx. 6kg |


# 4K 20X Muti-Function Professional PTZ Camera




## Feature

- 4K Ultra Resolution Output
- 60"Wide Angle Zoom-in Lens+ 20X Optical Zoom Lens
- Support USB3.0 and BYOM Service
- Support POE power and Built-in G-SENSOR.
- HDMI, SDI, IP, USB Multi Video Outputs
- Remote Control

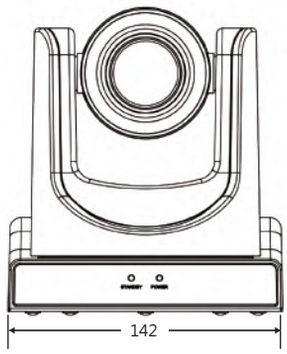



## Specification


| Model | | SVC-4KZ20i |
|---|---|---|
| Name | | 4K 20X Muti-Function Professional PTZ Camera |
| LENS | Lens Video Output | 4K(3840x2160P) 60/59.94/50/30/29.97/25fps,1080P 60/59.94/50/30/29.97/25fps,1080i 60/59.94/50fps |
| | Sensor | 1/1.8", CMOS, Effective Pixels: 8.51M |
| | Lens | 20x Zoom Lens: Focus f=6.7mm ~ 125mm, F1.58 ~ F3.95; Horizontal View: 60° ~ 3.5°, Vertical View: 35.7° ~ 2.0° |
| | S/N Ratio and Minimum Lux | ≥55dB, 0.5Lux (F1.8, AGC ON) |
| | Advanced Video Processing | Auto Focus, White Balance (Auto, Indoor, Outdoor, One Push, Manual), BLC, 2D&3D DNR (Digital Noise Reduction) |
| | PTZ Degrees & Speed | Horizontal: ±170°, Speed: 1.7° ~ 100°/Sec, Vertical: -30° ~ +90°, Speed: 1.7° ~ 69.9°/Sec, Auto Vertical Flip (Built-in G-Sensor) |
| | Preset Points & Precision | 255, 0.1° |
| | Camera Control Protocol | VISCA/Pelco-D/Pelco-P(RS-232/RS-485), VISCA over IP(RJ-45), ONVIF(RJ-45), UVC(USB) |
| USB FUNCTION | Operating System | Windows 7 (1080P or less resolution), Windows 8.1, Windows 10 or above / Mac OS 10.10 or above / Google Chromebook 29.0.1547.70 Ver. or above / Linux |
| | Coding/Compressing | YUY2(Support up to 1080 30fps) / H.264(AVC/SVC) / MJPEG / H.265(Support up to 2160 60fps) |
| | USB UVC Protocol | UVC 1.5, PTZ Control |
| IP Camera | Video Compressing | H.265 / H.264 / MJPEG |
| | Video Streaming | 32Kbps ~ 20480Kbps, Variable Rate / Fixed Rate |
| | Audio Format & Rate | AAC, 48/64/96/128Kbps |
| | Network Protocol | TCP/IP, HTTP, RTSP, RTMP, ONVIF, Multicast, NDI (Option) |
| Interface | Video Out | 1xHDMI (2.0 Ver.), 1x3G-SDI (BNC Type) |
| | Audio Output Rate | 32Kbps ~ 20480Kbps, Variable Rate/Fixed Rate |
| | Network | 1x Ethernet (10M/100M/1000M); POE; NDI (Option) |
| | USB | 1xUSB 3.0(Type C) |
| | Control I/O | 1xRS232 In (8pin Mini DIN), 1xRS232 Output (8pin Mini DIN), 1xRS485(2pin Phoenix Port) |
| | Power Connector | JEITA Type (DC IN 12V) |
| Normal | Input Power | DC 12V / POE(802.3af) |
| | Power Consumption | 12W (Max) |
| | Temp | Operating: -10°C ~ 40°C, Storage: -40°C ~ 60°C |
| | Dimensions (WxDxH) | 142mm x 169mm x 164mm |
| | Weight | 1.35Kg |

UPro Medical Inc.


# Laparoscopic Trainer

The LAPAROSCOPIC TRAINER assists medical surgery teams in training operations. It accurately replicates the endoscopic surgery environment with realistic simulations of the surgical process, providing users with a comprehensive endoscopic training experience.

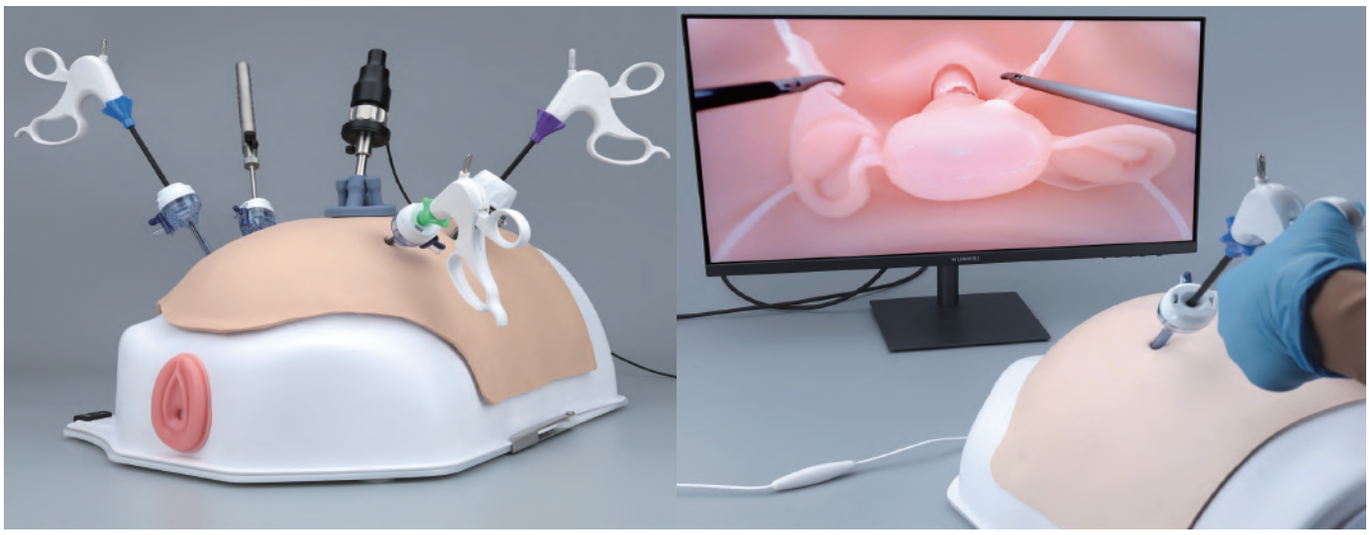



3D Suture Model




Intestinal Anastomosis




Precision Suture Model



Precision Cutting Model




Pelvic Model



Threading Model



Grasping Balls Model




Handling Model




Cannula Φ 5mm x2
Cannula Φ 10mm x1
Trocar Φ 5mmx1



Needle holder forceps Φ 5x330mm
Marryland dissector Φ 5x330mm
Cuvred scissors Φ 5x330mm
Grasping forceps Φ 5 x330mm



Ligation Model




Dissecting Module


# Arthroscopy Trainer



The ARTHROSCOPY TRAINER assists medical surgery teams in training operations. It accurately replicates the endoscopic surgery environment with realistic simulations of the surgical process, providing users with a comprehensive endoscopic training experience.

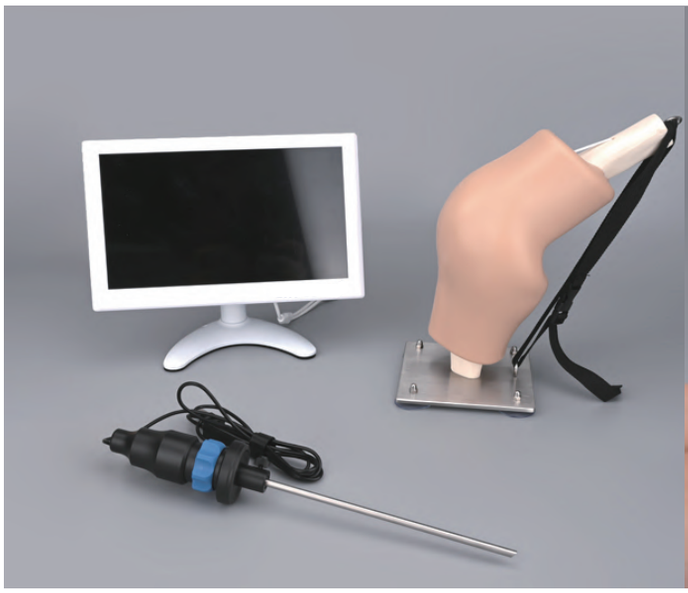

Aarthroscopy trainer

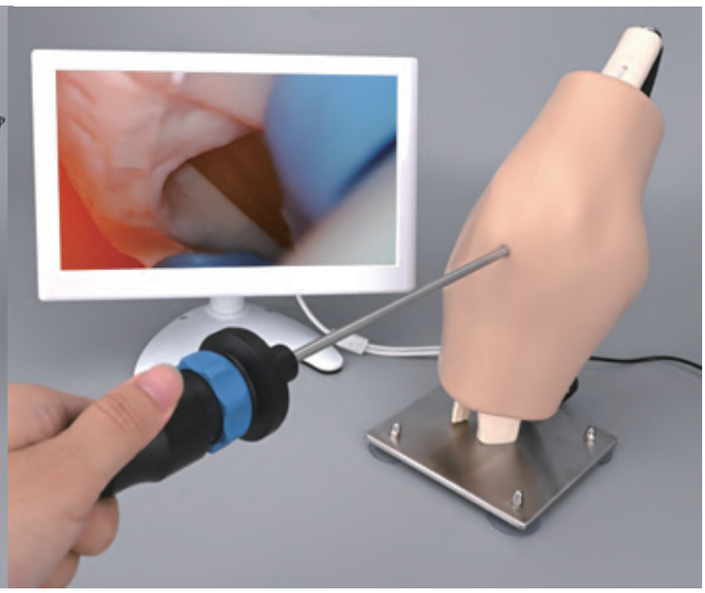

Practice view for camera



A model of the knee joint



Flexible and fixed



Metal plate base

## Option Camera Set



**0° or 30° Arthroscope Camera**

- 1280x720p
- USB Type C/A
- No distortion
- 5mm OD / 175mm length
- Adjustable focus with 8 LED lights
- WIN/ MAC/ ANDROID 8.0 compatible



**11-inch monitor**

- USB connection

# Medical Endoscope Trolley



## Feature

- The Distance and Height of Each Shelf Can Be Adjusted Freely
- Bottom Drawer with Power Socket
- Applicable to Medical Endoscopic Instruments, Various Instruments and Equipment for surgery, etc.

## Specification

| Model | UEC-104 |
|---|---|
| Name | Endoscopy Trolley |
| Cart Size | 570mm(W)x1,100mm(H)x630mm(D) |
| Net Weight | 45kg |
| Number of Shelves | 4 Shelves |
| Shelf Size | 400mm(W)x430mm(D) |
| Load Capacity | 20kg/Shelf |




# YOUR BEST PARTNER

OEM/ODM

WELCOME

UPro

UPro Medical Inc.

UPro Website


## UPro Medical Inc.

**www.upromedical.com**

Add：4F, No.92, Section 1, Neihu Road, Neihu District,
Taipei City 114, Taiwan (R.O.C.) 11493

TEL：+886-2-2659-0070